


### DS-2CE16D1T-IT1/IT3/IT5 HD1080P EXIR Bullet Camera




### EXIR

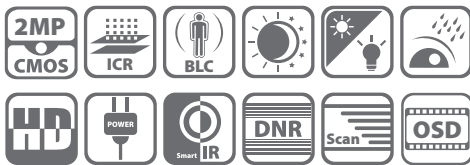

#### Key features

- HD1080P Video Output
- Adopt HDTVl Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40/80m IR distance
- IP66 weatherproof
- OSD menu controlled via UTC

#### Dimensions

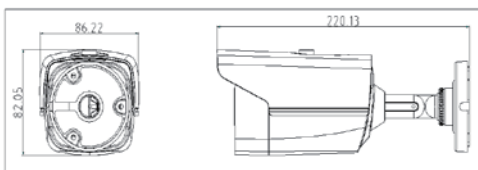

#### Accessories



Video balun  
DS-1H18

#### Available models

DS-2CE16D1T-IT1  
DS-2CE16D1T-IT3  
DS-2CE16D1T-IT5

	DS-2CE16D1T-IT1	DS-2CE16D1T-IT3	DS-2CE16D1T-IT5
<b>Camera</b>			
Image Sensor	2 MP CMOS Image Sensor		
Signal System	PAL / NTSC		
Effective Pixels	1930(H)*1088(V)		
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR		
Shutter speed	1/25(1/30) s to 1/50,000 s		
Lens	2.8mm, 3.6mm, 6mm optional	3.6mm, 6mm, 8mm, 12mm, 16mm optional	
	Angle of View: 105.8°(2.8mm), 84.3°(3.6mm), 55.4°(6mm)	Angle of View: 84.3°(3.6mm), 55.4°(6mm), 38.7°(8mm), 24.8°(12mm), 19.2°(16mm)	
Lens Mount	M12		
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°		
Day & Night	ICR		
Synchronization	Internal synchronization		
Video Frame Rate	1080p@25fps/1080p@30fps		
HD Video Output	1 Analog HD output		
S / N Ratio	More than 52dB		
<b>Menu</b>			
AGC	Support		
D/N Mode	Color/ BW/ EXT		
White Balance	Auto/ Manual		
BLC	Support		
Language	English/ Chinese		
Function	Digital noise reduction, Mirror		
<b>General</b>			
Working Temperature / Humidity	-40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing)		
Power Supply	12 VDC		
Power Consumption	Max. 2.5W	Max. 3.5W	Max. 5W
Weather Proof Ratings	IP66		
IR Range	Up to 20m	Up to 40m	Up to 80m
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)		
Dimensions	86.22×82.05×220.13mm(3.39" ×3.23" ×8.67")		
Weight	430 g (0.95 lb)		