




LK-102RC

- ⊙ Receiver power source : DC11~15V
- ⊙ Effective distance : more than 30M
- ⊙ Frequency : 300~400 MHZ (RF)
- ⊙ Code combination :
8-Bit (Codes can be programmed by yourself)
- ⊙ Relay contact : 5A/120VAC
- ⊙ Transmitter power source : DC12V battery (A23)
- ⊙ Dimension :
Receiver 48W x 87L x 23D mm
Transmitter 37W x 70L x 15D mm(PN type)
Transmitter 37W x 62L x 15D mm(RB type)



LK-102RM

WIRING DIAGRAM

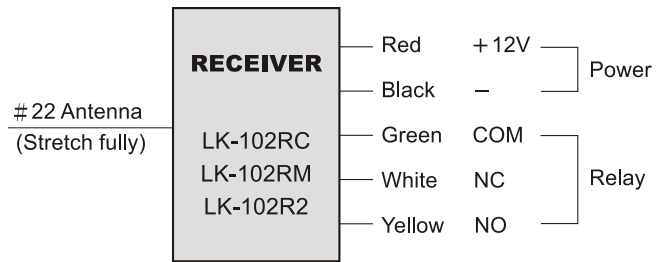

LK-102R2

LK-102RC	ON	Press "ON" button (PN type), or any of the "RED"/ "BLUE" buttons (RB type) and RELAY will be turned on and stay on until the button is released.
LK-102RM	ON	Press "ON" button (PN type), or any of the "RED" / "BLUE" buttons (RB type) the RELAY will be turned on and stay on for approximately one second.
LK-102R2	ON	Press "ON" button (PN type) or the "RED" button (RB type), the RELAY will be turned on.
	OFF	Press "OFF" button (PN type) or the "BLUE" button (RB type), the RELAY will be turned off.