

# CS-C2mini-31WFR

720p Indoor mini Wi-Fi Camera



## Introduction

EZVIZ products have been designed for your entertainment, communication, security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-

## Main Features



HD 720p



Local video storage on a micro SD/SDHC memory card up to 64GB



Wi-Fi Certified 2.4GHz



Built-in microphone for audio recording




Night vision




Secure cloud recording\* (Optional)

## Dimension

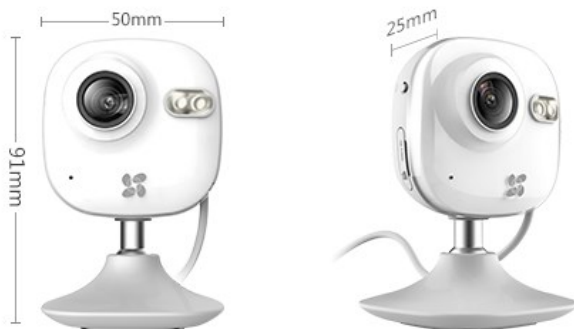

## Accessories (Reference)



Power Adaptor



Quick Start Guide



Foam Sticker



Metal plate



Screw Kit

# Specifications

Model	CS-C2mini-31WFR
<b>Camera</b>	
Image sensor	1/3" progressive scan CMOS
Minimum Illumination	0.02Lux @(f/2.2, AGC ON) , 0 Lux with IR
Shutter	1/30s to 1/100,000s
Lens	2.4mm @ f/2.2, angle of view: 115°, opposite angle 130°
Lens Mount	M12
Day & Night	IR cut filter
DNR	3D DNR
IR Range	Up to 32.8 feet (10m)
WDR	Digital WDR
Audio	Mircophone
<b>Compression</b>	
Video Compression	H.264 Main Profile
Video Bit Rate	HD, balance, and fluency. Adaptive bit rate.
Audio Bit Rate	Adaptive bit rate
<b>Image</b>	
Max. Resolution	1280 x 720 (Platform);1280 x 960 (Device)
Frame Rate	Max: 25fps Network transmission frame rate: adaptive adjustment
<b>Network</b>	
Storage	Support micro SD card (≤ 64 GB)
Smart Alarm	Smart motion detection
One-key configuration	SmartConfig (Wi-Fi one-key configuration)
Interface Protocol	Ezviz cloud proprietary protocol
General Function	Dual-stream, Mirror image, password protection
<b>Wireless parameters</b>	
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz to 2.4835 GHz
Channel Bandwidth	Support 20/40MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g :54Mbps, 11n :150Mbps
<b>General</b>	
Operating Conditions	14 °F to 122 °F (-10°C ~ 50°C ), Humidity 95% or less ( non-condensing)
Power Consumption	DC 5V±10% , 3.5W Maximum
Dimensions (inch)	3.58*1.96*0.98"(91mm*50mm*25mm) (contain bracket)
Weight	0.24 lb (110 g)