


DIGIPLX EVO

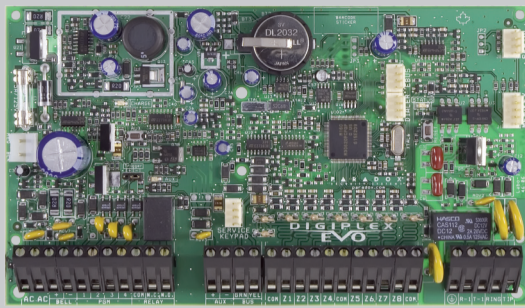

EVO192 192-Zone Control Panel

Features

- * 8 on-board zones (16 w/ zone doubling)
- * Built-in access control features
- * Supports PCS Series, IP Module (IP100) and Voice Module (VDMP3)
- * In-field firmware upgrade via 307USB and WinLoad
- * Compatible with NEware V4.0 or higher
- * Automatic Daylight Savings Time feature
- * PGM1 can be used as a 2-wire smoke input
- * Program remote controls using the master or installer codes
- * Built-in real-time clock backup battery
- * 1.7A switching power supply
- * 1 supervised bell output, auxiliary output and telephone line
- * Patented 2 opto coupler dialer circuit - the most reliable dialer in the industry (US Patents 5751803, RE39406)
- * Push button software reset (reset to default values and restart)
- * Push button to activate or deactivate the Auxiliary output
- * Fits in a 28cm x 28cm x 7.6cm (11in x 11in x 3in) metal box
- * The EVO series share the same programming for easy panel substitution

Feature	EVO192
Maximum Zones	192
PGMs	250 (5 on board)
Multibus	
User Codes	999
Partitions	8
Events Buffered	2048
Expansion Modules	254
Remote Controls	999 (w/RTX3)