

Floor and Wall Mount Door Holder

Model: YD-605

Basic Instruction

Voltage Selectable 24VDC (12/24VDC need order)
Emergency Release Button/Test Button
Wall Mounting Direction



Low Current Consumption
Reliable Fail-Safe Mechanism
Durable and Silence Operation

Specifications


- Dimensions: 118Lx92Wx120H(mm)
- Voltage: 24VDC
- Current Draw: 24V/50mA
- Optional: Manual door release button
- Surface Temp: $\leq +20^{\circ}\text{C}$
- Operating Temp: $-10\sim+55^{\circ}\text{C}$ (14-131F)
- Weight: 0.96kg

- Holding Force: 50kg(100Lbs)
- Suitable for: All Kinds of Single Double Smokeproof Door
- Suitable Humidity: 0~90%(relative humidity)
- Finishes for Shell: High Temperature Paint and Environmental Protection Zinc
- Finishes for Armature: Zinc


Dimension



Installation



Installation

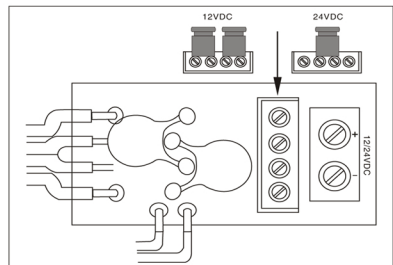

Wiring Instructions