


# DS-2CE16C2P(N)-IT5

## 720 TVL PICADIS EXIR Bullet Camera




**EXIR**

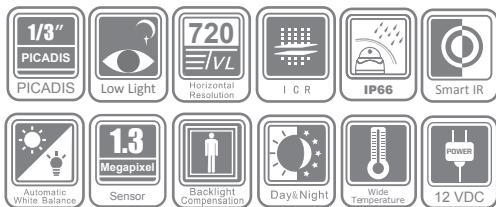

### Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- True Day/Night
- 720 TVL Horizontal Resolution
- 80m IR Distance
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

### Dimensions

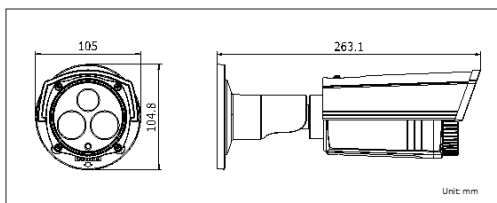

DS-2CE16C2P(N)-IT5	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) x 960 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6mm (6mm,8mm,12mm,16mm optional)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 5 W
Ingress Protection	IP66
IR Range	80 meters
Dimensions	105x104.8x263.1mm(4.13" x4.13" x10.36")
Weight	800 g (1.76 lbs)

### Available models

PAL: DS-2CE16C2P-IT5  
NTSC: DS-2CE16C2N-IT5

### Accessories



DS-1215ZJ  
(Pole Mount)